

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B32B 5/16, 9/04, 15/04, 29/00, 23/04, 21/06, C09J 105/00, 4/00, 101/00, B05D 3/02, C08L 97/02, 1/00	A1	(11) International Publication Number: WO 00/58085 (43) International Publication Date: 5 October 2000 (05.10.00)
(21) International Application Number: PCT/US00/08143 (22) International Filing Date: 28 March 2000 (28.03.00) (30) Priority Data: 60/127,146 31 March 1999 (31.03.99) US (71) Applicant: PENFORD CORPORATION [US/US]; Suite 2390, 777 108th Avenue N.E., Bellevue, WA 98004-5193 (US). (72) Inventors: ROGOLS, Saul; 23573 Pondview Place, Golden, CO 80401 (US). SIROVATKA, Denise, M.; 3360 West 33rd Avenue, Denver, CO 80211 (US). WIDMAIER, Robert, G.; 20123 186th Place NE, Woodinville, WA 98072 (US). (74) Agent: SHARP, Jeffrey, S.; Marshall, O'Toole, Gerstein, Murray & Borun, 6300 Sears Tower, 233 South Wacker Drive, Chicago, IL 60606 (US).		(81) Designated States: CA, CN, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: PACKAGING AND STRUCTURAL MATERIALS COMPRISING POTATO PEEL WASTE (57) Abstract The present invention provides adhesive and binder compositions comprising a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fibers.		

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**PACKAGING AND STRUCTURAL MATERIALS
COMPRISING POTATO PEEL WASTE**

5 This application claims priority from U.S. Provisional Application Serial
No. 60/127,146 filed March 31, 1999.

BACKGROUND TO THE INVENTION

() 10 The present invention relates to natural materials which can be used as
adhesives and binders. Natural carbohydrate and protein materials are used as binders
and adhesives in a variety of applications. Carbohydrate materials, and in particular
starches, are well known for use as components of adhesive compositions such as
corrugating adhesives for paper and paperboard. A particularly useful corrugating
adhesive comprises starch which is cooked in the presence of borax and caustic.

15 Starches are also used as binders in the paper industry in applications such
as binders for light weight coatings. Cationic starches are also known to be useful as
wet-end adhesives in paper manufacture. In addition, starch is known for use as a
component in composite compositions such as those of Anderson et al., U.S. Patent No.
5,385,764 and Anderson et al., U.S. Patent No. 5,545,450 which comprise combinations
of starch, fiber and calcium carbonate or other minerals.

20 Gums including alginates, gellan, locust bean and xanthan gum are known
() to provide particularly useful adhesive and binding properties at low concentrations when
used in a variety of applications. Gums are particularly useful as binders in food
compositions and particularly in composite food compositions.

25 Proteins provide excellent performance as adhesives and as binders in a
number of applications but are reserved for use in certain specialized applications
because they are generally more expensive than starches. Typical protein adhesives and
glues include animal glues produced from collagen found in animal skin, connective
tissue and bone. Fish glues made from the skin of fish such as cod also comprise
collagen but with a lower molecular weight than other animal collagen. Casein protein
30 is particularly useful in glues and in coatings for paperboard, plywood, door and furniture
assembly because of the high adhesive strength which it provides. Glues produced from

soy protein are useful as interior plywood glues, laminating glue for wood, door assembly, furniture assembly and other wood bonding applications. Blood proteins derived as byproducts of the meat industry also provide excellent adhesive properties and are used as adhesives in the manufacture of plywood and as bonding materials in sea
5 foods such as surimi.

Potato plant tubers referred to herein as potatoes comprise several structures. Of these structures, the following make up the core from the center of the potato out: the pith, the vascular storage area, the vascular ring, followed by the so-called peel portion which consists of a cortex and a periderm. Approximate analysis of the
10 entire white potato indicates about 77% water and solids of about 23%. Of the solids percentage, roughly 15% is starch and 2% is protein. The protein is located between the cortex and the periderm peel layer. In the processing of potatoes for food or industrial uses it is frequently desired to separate the potato peel from the heart of the potato, in order to make use of the substantially pure starch. The starch may be partially or
15 completely gelatinized such that the peel is only weakly bound to the heart of the potato. Potato peel waste is thus produced as a byproduct in the processing of potatoes for food uses such as the manufacture of french fries, potato chips and in the processing of potatoes for industrial uses.

According to one method of processing potatoes to remove the potato
20 skin, steam is directed against the exterior of potatoes such that the layer of starch immediately adjacent the potato peel is partially or completely gelatinized. The potato is then subjected to mechanical processing such that the peel with a layer of partially or completely gelatinized starch is separated from the heart of the potato which is then subjected to further processing. The resulting potato peel product comprises mostly
25 water with the balance made up of gelatinized and ungelatinized starch, protein, fiber and ash. Prior to its disposal or other use the potato peel product is frequently combined with other waste streams containing byproducts of potato processing. Such streams of what is sometimes known as potato "trim waste" contain potato trimmings and other byproducts of potato production. As such, the trim waste typically comprises relatively
30 higher levels of starch (and where fryer waste from french fry production is combined, fat) and relatively lower levels of protein and fiber than does peel waste.

Whether or not the potato peel product includes potato trim waste, the potato peel waste product has little commercial value because it comprises a heterologous mixture of water, protein, fiber and starch. As a result potato peel products are usually disposed of as waste or are used as a liquid supplement to animal feed. Because the potato peel product can be costly to dispose of as waste and is expensive to transport and provides only marginal economic value when used as animal feed, there remains a desire in the art for new applications for potato peel products.

SUMMARY OF THE INVENTION

The present invention is based on the discovery that potato peel products such as derived from potato peel waste or potato peel waste in combination with potato trim waste are characterized by particularly useful properties as adhesives and binders in a variety of industrial and food product uses. Other uses for the potato peel products of the invention include use in oil well drilling mud, soy based adhesive coatings used in coated fine paper and in wet-end papermaking applications to increase bonding in brown paperboard. Potato peel products useful according to the invention can be derived in any of a variety of manners but are preferably potato peel waste such as produced by steam peeling potatoes. Alternatively, potato peel products useful according to the invention can be potato peel waste combined with potato trim waste and other materials.

While starches and certain proteins are known to be useful as adhesives and binders in various applications it has been found that the specific combination of gelatinized starch, ungelatinized starch, protein and fiber making up potato peel waste is characterized by particularly useful adhesive and binding properties. This is particularly the case when the potato peel products comprise potato starch which has not been completely gelatinized and those products are heated under conditions selected to complete gelatinization of the starch during setting of the adhesive or binder material.

Among other uses, the potato peel products of the invention may be used as adhesives and as binders in edible and non-edible composite materials. According to one aspect of the invention a non-edible composite material is provided which comprises a non-edible substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least

2% fiber. Preferred potato peel products according to the invention comprise greater than 40%, more preferably greater than 50% and most preferably 55% to 65% starch on a dry solids basis; and from 2% to 20% fiber with 4% to 20% being preferred. Protein is preferably present at dry solids levels of from 5% to 30% with concentrations of 10% to 25% being particularly preferred.

Non-edible composite materials of the invention can comprise non-edible substrate materials including but not limited to mineral particles such as calcium carbonate, wood particles and fiber and paper fiber. Representative composite materials using potato peel products as binders according to the invention include materials such as gypsum wall board, acoustical tile, particle board and packaging materials.

The invention also provides a method of producing a non-edible composite material comprising a substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch wherein said starch is not completely gelatinized, at least 5% protein and at least 2% fiber to form a mixture; and heating said mixture under conditions selected to complete gelatinization of said starch.

Also provided by the invention are adhesive compositions comprising a potato peel product. One particularly preferred adhesive is that comprising a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber which has been treated with borax and caustic.

The adhesive compositions of the invention are particularly useful for adhering paper or paperboard as corrugating and paper adhesives and also as labeling adhesives. According to one aspect of the invention the use of the potato peel products of the invention provide improvements in the printability of coated paper box and board containers. As corrugating adhesives the compositions of the invention provide particularly good properties for adhesion of both coated (including lightweight coated) and uncoated papers. The adhesives of the invention are also useful as architectural adhesives for use as wallpaper, tiling and paneling adhesives and are also particularly useful as adhesives in the production of architectural laminates including but not limited to plywood.

The potato peel products of the invention are also useful as binders in composite food products comprising an edible substrate and a binder. Suitable composite food products which can be produced according to the invention include meat analogs such as vegetable burger patties which can comprise soy protein as the substrate. Other composite food products which can comprise the potato peel products of the invention as binders include vegetable analogs and composite meat products including such products as sausage and surimi. Another food application is the binding of fat and water together in meat based sauces such as those used in Mexican and Italian cuisine.

The potato peel products of the invention can also be used in agriculture as soil binders to prevent silt migration in irrigated farming. Such binders would be superior to polyacrylamide flocculants currently used in such applications because of environmental concerns regarding the use of synthetic polymers. As such, the potato peel products of the invention may be added at concentrations of from 5 to 1000 ppm to irrigation water to prevent silt migration.

The potato peel products of the invention can also be used as binders in industrial applications such as in paper manufacture by being derivatized with a cationic substituent and used as a wet-end binder in paper manufacture. For this, suitable cationic derivatives include quaternary ammonium compounds can be used to derivatize the potato peel product according to methods known to the art.

Preferred levels of substitution with cationic reagents range from about 0.2 to about 2.0 cationic groups per anhydroglucose unit depending upon the intended application for the derivatized potato peel product with actual cationic substitution levels being less than those applied.

The potato peel products of the invention may also be derivatized with anionic substituents such as by oxidation with 0.9% chlorine based on a dry starch weight. Moreover, amphoteric potato peel products can be produced by a combination of cationic and anionic substitution. According to a further embodiment of the invention, charged coatings can be applied electrostatically by a dry coater apparatus.

Other preferred potato peel materials of the invention include potato peel waste which has been subjected to an oxidation reaction and is useful for increased adhesiveness. It is further contemplated that potato peel waste that has been subjected

to a cross linking reaction with cross linking agents such as phosphorus oxychloride will exhibit useful properties as adhesives and wet end strength additives in the manufacture of paper.

5 In addition a potato peel product which has been treated with caustic demonstrates particularly good stability properties when stored for prolonged periods. Caustic addition can vary between 0.7% and 4% of peel waste with a pH measurement higher than 11 being preferred.

Other potato peel products which are useful according to the invention are those which are chemically modified by any of a variety of procedures which modify and
10 improve the binding and adhesive properties of the product. Suitable chemical modifications include chemical derivatization including but not limited to oxidation, chemical crosslinking, anionic substitution, cationic substitution, modification by hydroxy-alkyl substitution and the like. While such chemical derivatization is expected to have its most significant effects on the starch content of the potato peel product it is
15 also expected to have effects on the protein and fiber components of the potato peel products. Other chemical modifications of the potato peel product of the invention include hydrolytic modification of the potato peel product by acid or enzyme hydrolysis of the starch and other carbohydrate content of the product. It is further contemplated that the products can be subjected to enzymatic hydrolysis of the protein content by
20 treatment with proteases.

Other potato peel products of the invention include those which are subjected to physical grinding to produce a particulate matter characterized by a particle size wherein 100% passes through a U.S. Standard No. 60 sieve.

25 BRIEF DESCRIPTION OF THE DRAWING

Figure 1 depicts the RVA viscosities of oxidized and cationic potato peel products compared with an unmodified potato peel product (control) of the invention.

DETAILED DESCRIPTION

30 Potato peel products of the invention may be used as adhesives and binders in a variety of different applications. Suitable industrial applications include as

binders in non-edible composite materials comprising mineral or vegetable particles as substrates. Such products include gypsum wall board, acoustical tile, paper manufacture and particle board. The potato peel products may also be used as adhesives in industrial uses such as paper and paperboard adhesives and architectural adhesives. In addition, the
5 potato peel products may be used as binders in composite food products comprising edible substrates, and are particularly useful in binding fat and water to the meat component of the food product.

The potato peel products of the present invention are characterized by a minimum content (on a dry solids weight basis) of at least 30% starch, at least 5% protein
10 and at least 2% fiber. It is preferred that the starch component of the potato peel product not be completely gelatinized prior to its end use as a binder in a composite material or as an adhesive in an adhesive system. Without intending to be bound by a theory of the mechanism of the invention, it is believed that the ability of ungelatinized starch present in the potato peel product to gelatinize in the presence of the fiber and protein
15 components of the potato peel product functions to provide a uniquely powerful bond with the substrate of the resulting composite. As a consequence, it is preferred that the potato peel product not be completely gelatinized (cooked) prior to its application as an adhesive or binder. Those of skill in the art will be capable of determining the level of pregelatinization of the starch component of the potato peel product which is detrimental
20 to the binding properties of the product.

A potato peel product which comprises both gelatinized (pregelled) starch and ungelatinized (cookup) starch and which is characterized by particularly good adhesive and binding properties is potato peel waste such as is obtained directly from the process of steam peeling potatoes. The process of removing potato peels from the heart
25 of the potato by steam cleaning functions to partially or completely gelatinize a layer of starch beneath the surface of the peel allowing for a more ready mechanical removal of the peel. The resulting potato peel product is characterized by both gelatinized and non-gelatinized starch and has particularly good adhesive and binding properties. Steam peeling such that a portion of the potato starch is precooked is typically practiced in the
30 United States. By contrast, the potato starch is generally not precooked by peeling methods practiced in Europe.

The potato peel product also comprises fiber which is primarily (generally 60% or more of the fiber) hemicellulose fiber but which also comprises cellulose, digestible fiber and non-digestible fiber. The potato peel product also comprises protein. The potato peel product also comprises ash which is the mineral content of the product.

- 5 When the potato peel product is obtained directly as the product of steam peeling it is referred to as "potato peel waste." Potato peel waste products from commercial processes were characterized by a composition such as that set out in Table 1 below.

Table 1 also discloses analyses of two potato peel products which consist of the product of potato peel waste produced by steam peeling combined with potato trim
10 waste produced by other potato processing operations. Because potato trim waste typically comprises trimmings from the starchy potato heart, potato peel products including potato trim waste typically comprise relatively more starch and relatively less protein and fiber than potato peel products derived exclusively from steam peeled potato peel waste. Further, when the potato trim waste includes recycled trimmings from the
15 potato frying, the oil content of the potato peel product will be relatively higher. Further, to the extent that the potato starch is gelatinized during frying, the ratio of ungelatinized to gelatinized starch in the potato peel product will be decreased. The inclusion of oil and increased levels of gelatinized starch into the potato peel product can be tolerated provided that the level of neither reaches so high that it interferes with the adhesive and
20 binding properties of the product. It would be well within the skill of those in the art to determine such levels. In addition, the potato peel products of the present invention can also comprise "culls" which are intact small potatoes and potato pieces that typically are included in waste streams.

TABLE 1			
Components	Potato Peel Waste	Peel and Trim	Peel and Trim
Moisture	9.89%	9.33%	5.74%
Crude Fiber	7.80 g	3.95 g	3.31 g
Ash	9.24 g	4.16 g	4.93 g
Sugars	2.73 g	<0.50 g	0.94 g
Carbohydrates	62.15 g	69.5 g	71.8 g
Fat	0.38 g	7.00 g	5.72 g
Protein	18.34 g	10.01 g	12.19 g
% Pregelled Starch	11.9%	21.8%	~20%

While there exist plentiful sources of potato peel products in the form of potato peel waste, it will be recognized that the adhesives and binders of the invention may be produced using potato peel products derived from other sources including the processing of potato peels and potato starch specifically for the purpose of practicing the present invention. Thus, the protein, fiber and ash making up the potato peel can be isolated separately from gelatinized and ungelatinized potato starch which can then be combined to produce the potato peel products of the invention.

The potato peel products of the invention are contemplated to be particularly useful as adhesives and binders in a variety of applications. When used as binders in non-edible composites the potato peel products of the invention may be combined with mineral and non-mineral substrates including but not limited to calcium carbonate, wood particles, wood fiber, paper fiber, pressed wood, plywood, gypsum board, acoustical tile, low-grade wallboard and the like. The concentrations of peel products will vary according to the degree of adhesiveness that is required as well as the durability of the final product. The potato peel products of the invention may be substituted for starch in non-edible composites at solids concentrations equivalent to or even less than those of the starch binder used conventionally despite the fact that the starch proportion of the potato peel product is typically less than half that of the conventional binder. Moreover, the structural and functional properties of the resulting

product are equivalent to or superior to those using conventional starch or other materials as binders.

It is contemplated that the potato peel products of the invention will prove particularly useful as binders in materials such as gypsum wall board, acoustical tile, particle board and packaging materials. When used in these products, the potato peel materials of the invention will act as binders bonding together the components of the final product.

According to one aspect of the invention, it has been found that potato peel products are particularly useful binders in packaging materials and containers comprising highly inorganically filled materials such as those disclosed in Anderson et al., U.S. Patent No. 5,385,764 and Anderson et al., U.S. Patent No. 5,545,450 the disclosures of which are hereby incorporated by reference. These patents disclose environmentally desirable packaging containers having the ability to degrade after prolonged exposure to water. Containers comprising such packaging materials may be used to package food including fast food and comprise a matrix reinforced with fibers, the matrix comprising a substantially homogeneous mixture of aggregate and organic binder which is formed by the evaporation of water from an inorganically filled mixture including water; a water disposable organic polymer binder which can be starch; an inorganic aggregate which can be clay, gypsum perlite, vermiculite, sand, glass and the like; and a fibrous material. Structural composites using the potato peel products of the invention also include plates, cups and bowls that can be combined with other biopolymers or synthetic polymers. Potato peel products can also be used for such eating utensils as forks, knives, spoons and the like.

The potato peel products of the present invention may also be used as adhesives for paper and paperboard and as architectural adhesives such as for wallpaper, tiling and paneling adhesives. The potato peel products may also be used as adhesives in the production of architectural laminates including but not limited to plywood and decorative laminates and paneling. A particularly useful adhesive composition is that comprising a potato peel product in combination with borax and caustic. The proportion of potato peel waste can be as high as 97% of the total dry weight with caustic and borax making up the remainder. Such adhesive compositions are particularly useful as

corrugating adhesives for use with paper and paperboard. The corrugating adhesives of the invention are useful for adhering both uncoated and coated paper. The potato peel products of the invention are also useful as components of adhesive compositions for the tape and envelope trade. The potato peel products can be used in combination with and to replace portions of dextrans, proteins and highly modified starches that are usually components of such tape and envelope adhesives.

The potato peel products of the invention are also useful for use as binders in composite food products comprising an edible substrate and a binder. The potato peel products of the invention are nutritious and provide excellent binding properties to composite food products and are substantially less expensive than other food grade binder materials such as gums and modified food starches. Suitable composite food products which can be produced according to the invention include meat analogues such as vegetable burger patties which can comprise soy protein as the substrate. Other composite food products which can comprise the potato peel products of the invention as binders include vegetable analogues and composite meat products including such products as sausage and surimi. A particularly surprising use is for binding fat and water together in meat based sauces.

The following examples are presented to more clearly illustrate the invention. Examples 1 and 2 describe the use of a potato peel product as a corrugating adhesive for adhering paper. Example 3 describes the effect of pH on corrugating adhesives. Example 4 describes the substitution of a potato peel product for a portion of the potato starch binder in a disposable "clamshell" food container. Example 5 describes the use of a potato peel product as a binder in vegetable "burger" patties and Example 6 describes the use of a potato peel product as a binder in a meat sauce. Example 7 describes the preparation of oxidized and cationic potato peel products of the invention while Example 8 presents a comparison of the physical properties of the various potato peel products.

EXAMPLE 1

According to this example, the potato peel product of the invention was used as a corrugating adhesive. Conventional corrugating adhesives comprise pearl corn

starch or a low oxidized dent corn starch such as Douglas 3018 Corrugating Starch (Penford Corporation, Cedar Rapids, IA) combined with caustic and borax. The basic adhesive formula has approximately 20% commercial solids and contains the common additives caustic (sodium hydroxide) and borax. The preparation of the adhesive consists of heating an aqueous suspension of starch in the presence of caustic for the carrier portion, and later adding this to a mixture of the raw starch portion and borax in additional water. The corrugating adhesive is unique in that it has little tack in its prepared form but is cooked in situ after being applied. By the application of heat, a combination of physical and chemical changes occur which result in an almost instantaneous increase in viscosity and setting up of the adhesive.

Specifically, potato peel waste obtained from the steam peeling of potatoes and having 9% moisture was used in place of either a low oxidized dent corn starch (Douglas 3018) or a high amylose corn starch (Hylon[®]) in the formula set out in Table 2 below:

TABLE 2		
Component	Control Adhesive (gm)	Potato Peel Adhesive (gm)
Starch	16	--
Potato Peel Product (1st addn.)	--	84.5
Water	92	21.6
Caustic (50% NaOH)	7	7
Water	80	80
Borax	4	4
Starch (12% H ₂ O)	16	--
Potato Peel Product (2nd addn.)	--	84.5
Water	75	5

The adhesives are prepared according to a conventional procedure. Water is added to the first addition of peel waste. With mixing, the mixture is heated to 120° F

at which point caustic is added and the mixture is further heated to 140° F. Water is then added with strong agitation for at least 5 minutes followed by the addition of borax and the final addition of peel waste. The entire adhesive mixture is maintained at approximately 120° F with strong agitation for at least 5 minutes before use.

- 5 (Occasionally in a commercial setting, water may be added at the very end of the formulation in order to enhance the flow of the adhesive mixture. Our formulation work did not do this.) According to our invention, the potato peel product is first ground to a mesh size of 100% through a U.S. Standard No. 60 mesh.

The resulting corrugating adhesives were then applied by a gravure roll
 10 to uncoated light, medium and heavy paper sheets characterized by basis weight of 5.3, 6.7 and 14.1 pounds per standard ream and previously coated board which were bonded together. The resulting sheets were dried overnight and subjected to a Scott Bond Test using a Huygen AV-2 digitized internal bond tested under conditions of controlled temperature and humidity. The results of the testing, which measures force in foot
 15 pounds required to break the adhesive bond, are presented in Table 3 below. A "no adhesive" control was provided in which the adhesiveness of the Scott Bond tester standard adhesive paper control served as an instrument control.

20

TABLE 3 (Internal Bond Strength (foot pounds x 1000))						
Adhesive Composition						
Paper Weight	No Adhesive (Control)	Douglas 3018 Starch 16% Solids	Hylon® High Amylose Starch 16% Solids	Peel Product 7% Solids	Peel Product 10% Solids	Peel Product 16% Solids
25 Light Weight	139	147	175	99	108	151
Medium Weight	96	142	145	132	121	133
30 Heavy Weight	175	205	183	120	142	172
Coated Board	---	93	158	146	---	---

The results presented in Table 3 show that corrugating adhesive comprising the potato peel products of the invention provided an adhesive bond comparable to those provided by commercially available corrugating starches.

5

EXAMPLE 2

According to this example, the potato peel waste product of the invention was used as a corrugating adhesive according to the general method of Example 1. Specifically, potato peel waste (9% moisture) which was ground to a size wherein 100% passed through a U.S. Standard No. 60 mesh and was used in place of a conventional corrugating starch according to the formulation of Table 4 below: The formulation of Table 4 was then modified by the substitution of starches for potato peel waste at either or both of the "carrier" starch portion or the "raw" starch portion as set out in Table 5.

15

20

25

TABLE 4	
Component	Potato Peel Adhesive (gm)
Starch	--
Potato Peel Product (1st addn.)	84.5*
Water	21.6
Caustic (50% NaOH)	7
Water	80
Borax	4
Starch (12% H ₂ O)	--
Potato Peel Product (2nd addn.)	84.5
Water	5

*All of initial water (21.6 gm plus 80 gm) used to slurry first portion of peel product.

30

The adhesives were prepared according to the conventional procedure of Example 1 and were applied by gravure roll to lightweight and medium weight paper sheets characterized by basis weights of 5.3 and 6.7 pounds per standard ream

respectively which were bonded together with a hot iron at its highest heat setting for 10 seconds to gelatinize the cook-up starch in the compositions. After ironing, some of the sheets were sampled to determine "Green bond" strength which is reported in Table 5 below. The remaining bonded sheets were then pressed under a weight for four hours and allowed to dry overnight at 105°F and subjected to a Scott Bond Test using a Huygen AV-2 digitized internal bond tester under conditions of controlled temperature and humidity. The results of the testing are presented in Table 5 below.

TABLE 5				
Exp. No.		Scott Bond (foot lbs x 1000)		Green Bond
		Lt. Wt.	Med. Wt.	
2A	Raw = 10% Starch (16.7% solids total) + 90% PW	281	242	L
2B	Raw = 2% Starch (16.7% solids total) + 98% PW	294	232	L
2C	Raw = 2% Starch (12 % solids total) + 98% PW	346	243	H
2D	Raw = 5% Starch (12 % solids total) + 95% PW	290	243	VH
2E	Raw = 15% Starch (12% solids total) + 85% PW	283	228	VH
2F	Raw = 50% Starch + 50% PW Carrier = 50% Starch (12% solids total) + 50% PW	386	229	VH
2G	Carrier = 50% Starch (12% solids total) + 50% PW	323	242	VVH
2H (Control)	100% Douglas Starch (oxidized) (12% solids total)	402	243	H
2I (Control)	100 % Pearl Starch (12% solids total)	408	285	M
2J	All Peel Product no heat (12% solids total)	280	188	VH
2K	Raw = 95% Pearl Starch + 5% PW (12% solids total) Carrier = 5% Pearl Starch + 95% PW.	171	250	VH
2L	Douglas w/ (12% solids total)	260	244	H
2M	All Peel Product normal w/heat (12% solids total)	302	194	L

L = low, M = medium, H = high, VH = very high, VVH = very, very high, PW = Potato Peel Product.

EXAMPLE 3

According to this example, the effect of pH on corrugating adhesives comprising peel waste was determined. While conventional starch-containing corrugating adhesives generally require a high pH to provide good binding properties such a high pH can interfere with printing on the corrugated products. According to this example, the level of NaOH was reduced in producing corrugating adhesives otherwise having the formula of Table 2 above but wherein ground peel waste was substituted for 100% of the starch. The results in Table 6 show that as the pH was lowered from 11.5 to 7.5, strength as measured by Scott Bond dropped significantly for the starch control while the corrugating adhesive comprising peel waste retained significant strength at the lower pH's.

TABLE 6				
pH	Starch (Control) Scott Bond (foot lbs x 1000)		Peel Waste Scott Bond (foot lbs x 1000)	
	Lt. Wt.	Med. Wt.	Lt. Wt.	Med. Wt.
11.5	117	122	229	129
9.4	181	110	220	129
7.5	78	100	159	124

EXAMPLE 4

According to this example the potato peel waste product of the invention was used as a binder in a disposable "clamshell" container such as used for packaging of cooked hamburgers. Specifically, potato peel waste obtained from the steam peeling of potatoes was substituted for proportions of the potato starch component of a composite packaging composition. The control and test formulas are set out in Table 8 below.

According to a conventional procedure, two pre-mixtures of materials were prepared. The first premixture was prepared by combining water, wood fiber recycled from paper, bleached fiber, calcium carbonate and unmodified ungelatinized (cookup) potato starch (Pencook 10, Penford Corporation) were combined in a mixer

(Hobart) for four to six minutes on a high setting. The blended mixture was then heated in a microwave oven to a temperature of 80-90°C in order to gelatinize the starch. The mixture was then mixed for six minutes and allowed to cool below the gelatinization temperature of the starch. The second premixture was then added to the first premixture.

- 5 The second premixture comprised water, guar gum, unmodified ungelatinized (cookup) potato starch (Pencook 10, Penford Corporation) and magnesium stearate. The combined premixtures were then combined in a mixer (Hobart) for six to ten minutes.

- 10 The mixture was then applied to a mold and cooked at 200°C for 50 to 60 seconds under conditions which gelatinized the starch component of the composite to produce a solid "clamshell" package.

- 15 Composite packaging materials according to the invention were produced by substitution of potato peel product for proportions of the potato starch component in either the first or the second premixtures. For sample 4B in Table 7, potato peel products were added on a starch basis to replace 20% of the starch used in premix 1. Since the starch content of the potato peel waste used in this experiment was 20% by weight, 300 grams of potato peel was needed to replace 60 grams of potato starch. In sample 4C, where the potato peel waste products were added to premix 2, potato peel waste was added on a weight for weight substitution for potato starch. Solid clamshell packages were prepared according to the same method used for the conventional control (4A).

- 20 The resulting clamshell packages were then evaluated for appearance and smell and total weight and found to be acceptable. The packages were also tested for burst strength using a Mullen test with the results shown in Table 7.

TABLE 7			
Run	4A (Control)	4B	4C
Premix 1 (gms)			
Water	3000	3400	3000
Recycled Fiber	108	108	108
CaCO ₃	1103	1103	1103
Bleached Fiber	252	252	252
Potato Starch	300	240	300
Potato Peel Product	---	300	---
Premix 2 (gms)			
Water	1695	1695	1695
Guar Gum	30	30	30
Mg Stearate	60	60	60
Potato Starch	1748	1748	1448
Potato Peel Product	---	---	300
Mullen Burst Strength (psi)			
Bottoms	2.8	2.9	2.9
Tops	3.4	3.3	3.3

EXAMPLE 5

According to this example the potato peel product of the invention was used as a binder in the production of composite food product. Specifically, potato peel waste obtained from the steam peeling of potatoes was used as a binder in a hamburger beef patty analog also known as a "vegetable burger." In particular, the potato peel product was substituted for pregelled potato starch alone or pregelled potato starch in combination with xanthan gum used as binders in a conventional beef patty analogue. The control and test formulas are set out in Table 8 below.

The ingredients of Table 8 were dry mixed in a mixer (Hobart) and then blended with 200 mL of either purified water or peel waste filtrate comprising

- 20 -

substantially water with minor amounts of potato peel waste components dissolved therein to form patties. For example, the formulation of runs 5A-5C and 5F-5I had 200 mL of water added to form patties. In runs 5D and 5E the water was replaced with 200 mL potato peel waste filtrate. The formula of run 5F was the same as that of run 5D
5 except that the potato peel waste was subjected to grinding in a Waring blender with 100 mL of potato peel filtrate for two minutes. Additional water was added to total 120 mL of liquid. The patties were then baked at 350^oF for 15 minutes and evaluated visually for texture.

TABLE 9

Ingredients (gms)	5A	5B	5C	5D	5E	5F	5G	5H	5I
Full Fat Soy Flour	350	350	200	175	200	200	200	200	200
Vital Wheat Gluten	75	75	25	37.5	25	25	25	25	25
Sodium Caseinate	25	25	12.5	12.5	12.5	12.5	12.5	17.5	22.5
Pregelld Potato Starch	50	---	10	---	---	---	---	---	---
Xanthan Gum	---	---	2.5	---	---	---	---	---	---
Potato Peel Product	---	---	---	25	12.5	12.5	12.5	7.5	2.5
Total	500	450	300	250	250	250	250	250	250

Runs 5A and 5C were control products using pregelled potato starch alone (5A) or in combination with xanthan gum (5C). These products showed good texture having relatively few large cracks in the cooked patties. In contrast, the patties not including a binder (5B) exhibited a large number of cracks and poor texture. The patties comprising a potato peel product as a binder (5D, 5E, 5F and 5G) exhibited good texture with relatively few large cracks and were comparable to suitable controls which contained gums and/or starches as the binder. Those products using a potato peel product at lower levels (5H and 5I) exhibited more cracks and less desirable texture properties. When a potato peel product is present at the proper percentage of formula weight, these results show that the potato peel products of the invention provide valuable binding properties to composite foods and in particular meat analogues.

EXAMPLE 6

According to this example, the potato peel product of the invention was used as a binder for fat and water in the production of a meat based seasoned sauce preparation for a fast food Mexican sauce. Test formulations are presented in Table 10 below in which dried potato peel waste derived from steam peeling of potatoes was used as a binder in the composite meat sauce composition. The test formulations were compared against control formulations comprising no binder (6A and 6B) and a formulation comprising a commercially available potato fiber formulation Potex[®] 31 which has a composition characterized by 12% starch, 5% protein and 70% dietary fiber (6F). The composition of the dried potato peel waste is presented in Table 12 below.

TABLE 10

Formula	6A		6B		6C		6D		6E		6F	
	Wt. (g)	%	Wt. (g)	%	Wt. (g)	%	Wt. (g)	%	Wt. (g)	%	Wt. (g)	%
Meat (ground beef: 80% beef/20% fat)	908	68.35	908	68.35	908	64.94	908	61.52	908	66.99	908	66.99
Water	349.5	26.31	349.5	26.31	349.5	24.99	349.5	23.68	349.5	25.78	349.5	25.78
Seasoning	70.9	5.34	70.9	5.34	70.9	5.07	70.9	4.80	70.9	5.23	70.9	5.23
Potato Dried Peel Waste	---	---	---	---	69.92	5.00	147.6	10.00	27.01	2.00	---	---
Potato Fiber (Potex® 31)	---	---	---	---	---	---	---	---	---	---	27.1	2.00
Totals	1,328.4	100	1,328.4	100	1,398.32	100	1,476.0	100	1,355.5	100	1,355.5	100

- 24 -

According to the example, the ground beef was browned in a steam-jacketed kettle for 3.5 minutes at 170-180 °F, until no pink meat was observed. Water, seasoning and the potato peel product binder were added in that order, and were mixed and simmered for ten minutes. The seasoned meat was removed from the kettle and the
5 cooked/liquid weight was recorded. The meat was then strained and the liquid weighed and recorded and a visual and sensory evaluation of the products was made with the results reported in Table 11 below. These results indicate that the use of the potato peel product of the invention as a binder for retaining fats, oils and water in a ground meat based commercial formulation shows a significant increase in the retention of these
10 components when the formulation is completed. An additional unexpected result is that finished cooked meat weight increased by almost 30%. When these results are compared to the use of known commercially available potato fiber/starch combinations such as those of run 4F it appears that increases in retention of fats, oils, and water are also evident. Thus, the potato peel products of the invention can be used in place of a far
15 more expensive fiber ingredient.

In addition, analysis of the moisture and oil content of the products showed that the control product without any binder had a moisture content of 62.9% and an oil content of 26.6%. The sample containing 5% dried peel waste had a moisture content of 62.5% and an oil content of 28.1%. The sample containing 10% dried peel
20 waste had a moisture content of 57.0% and an oil content of 30.3%. These values confirm the observations that in the presence of peel waste oil can be retained (bound) by the meat portion of the formulation even though moisture remains approximately the same.

25

TABLE II

	6A	6B	6C	6D	6E	6F
Cooked wt. with liquid (g)	1030.70	1084.5	1210.86	1288.10	1139.1	1115.4
Cooked yield with liquid (%)	77.59	81.6	86.59	87.27	84.0	82.3
Strained liquid wt. (g)	146.80	180.0	70.07	10.81	74.4	74.0
Strained liquid (%)	14.24	61.7	5.79	.84	6.5	6.6
Cooked meat w/o liquid (g)	833.90	903.5	1140.70	1277.29	1064.7	1041.4
Cooked yield w/o liquid (%)	66.54	68.0	81.58	86.54	78.6	76.8
Cooked w/o liquid wt./green meat wt.	97.35	99.5	125.63	140.67	117.3	114.7
Moisture Content (%)	62.9	—	62.5	57.0	—	—
Oil Content (%)	26.6	—	28.1	30.3	—	—
Sensory/Visual	Typical Crumbly Cohesive	Typical Crumbly Cohesive	Less Crumbly Cohesive	Very Cohesive Paste Like	Fine Mushy Very Moist	Intermediate Texture Between 4B and 4E

TABLE 12	
Composition of Dried Potato Peel Product (Grams/100)	
Crude Fiber	3.95
Fat	7.00
Glucose	<0.5
Lactose	<0.5
Protein	10.01
Moisture	9.33
Ash	4.16
Carbohydrate (Total)	69.5
Fructose	<0.5
Maltose	<0.5
Sucrose	<0.5

EXAMPLE 7

According to this example, a dry potato peel product of the invention was oxidized by treatment with 0.9% chlorine overnight followed by a pH adjustment to 5.1 using diluted sulfuric acid.

Further, a potato peel product of the invention was subjected to cationic modification by treatment with a 65% quaternary-ammonium compound (Dow, Quat-188). The quaternary compound was applied at a 2% level based on starch weight at a pH of about 10.5 using a mixture of salt and caustic. After an overnight reaction, the pH was adjusted to 5.1 using concentrated sulfuric acid.

EXAMPLE 8

The oxidized and cationic potato products of Example 7 along with an unmodified potato peel product (control) were subjected to physical analysis by a Rapid Visco Analysis (RVA) apparatus (RVA Model No. 4, Newport Scientific, Warriewood NSW, Australia, 2102). According to the analytical method, a 30 gram sample of the

product to be analyzed is slurried to a 15% solids level, as is at pH 5.1 and subjected to a heating cycle starting at 25°C, heating to 95°C, holding at 95°C, cooling to 25°C and holding until finished.

5 The results of analysis of the oxidized, cationic and unmodified (control) potato peel products are illustrated in Figure 1 which depicts the viscosity profiles of oxidized, cationic and unmodified (control) potato peel products along with the heating profile for the experiment. These results show that both cationic and oxidative modification of the potato peel product result in dramatic reductions of the viscosity profiles of the modified potato peel products. The results showing that cationic
10 modification further reduces the overall viscosity compared to oxidation demonstrate that the cationic modification affects not only the starch component but also the cellulose and protein components of the potato peel product. By comparison, the profile for the unmodified potato peel product shows the effect of heat on the components of the peel product, hence the jagged plot, especially after heating the peel product. Modifying the
15 potato peel product by oxidation or by cationic modification can therefore provide substantial improvements to the potato peel products.

Numerous modifications and variations of the above-described invention are expected to occur to those of skill in the art. Accordingly, one such limitations as appear in the appended claims should be appended thereon.

WHAT IS CLAIMED:

1. A non-edible composite material comprising a non-edible substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber.

2. The composite material of claim 1 wherein said potato peel product is characterized on a dry weight basis by from 55 to 65% starch, from 5 to 30% protein and 4 to 20% fiber.

3. The composite material of claim 1 wherein said potato peel product is prepared by steam peeling potatoes.

4. The composite material of claim 1 wherein said substrate comprises calcium carbonate.

5. The composite material of claim 4 which is selected from the group consisting of gypsum wall board and acoustical tile.

6. The composite material of claim 1 which is particle board.

7. A method of producing a non-edible composite material comprising a substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch wherein said starch is not completely gelatinized, at least 5% protein and at least 2% fiber to form a mixture; and heating said mixture under conditions selected to complete gelatinization of said starch.

8. The method of claim 7 wherein said substrate comprises calcium carbonate.

- 29 -

9. A non-edible composite material produced according to the method of claim 7.

5 10. An adhesive comprising a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber which has been treated with borax and caustic.

11. The adhesive of claim 10 which is an adhesive for paper or paperboard.

() 10

12. The adhesive of claim 10 which is an architectural adhesive.

13. A method of adhering two substrates to one another comprising the step of applying the adhesive of claim 10 to a first substrate and adhering the first
15 substrate to a second substrate.

14. The method of claim 15 wherein said substrates are selected from the group consisting of paper, paperboard and wood plies.

20 15. A composite food product comprising an edible substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber.

()
25 16. The composite food product of claim 15 wherein said potato peel product is prepared by steam peeling potatoes.

17. The composite food product of claim 15 wherein said food product is selected from the group consisting of meat analogues, vegetable analogues and composite meat products.

30

- 30 -

18. The composite food product of claim 15 wherein said food product is a meat analogue.

5 19. The composite food product of claim 18 wherein the edible substrate comprises soy protein.

20. The composite food product of claim 15 which is a meat sauce.

10 21. A method of producing a composite food product comprising combining an edible substrate and a binder wherein said binder comprises a potato peel product characterized on a dry solids basis by at least 30% starch wherein said starch is not completely gelatinized, at least 5% protein and at least 2% fiber to form a mixture; and

15 heating said mixture under conditions selected to complete gelatinization of said starch.

22. A composite food product produced according to the method of claim 21.

20 23. A binder composition comprising a potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber wherein said potato peel product is modified by a cationic substituent.

25 24. A method of producing paper comprising treating paper at the wet-end with the binder composition of claim 21.

30 25. A potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber and caustic wherein said product is characterized by a pH of at least 11.


26. A potato peel product characterized on a dry solids basis by at least 30% starch, at least 5% protein and at least 2% fiber which is modified by a procedure selected from the group consisting of oxidation, crosslinking, anionic substitution, cationic substitution, hydroxyalkyl substitution and hydrolysis.

5

27. The potato peel product of claim 26 which is oxidized.

28. The potato peel product of claim 26 which is cationically substituted.

10

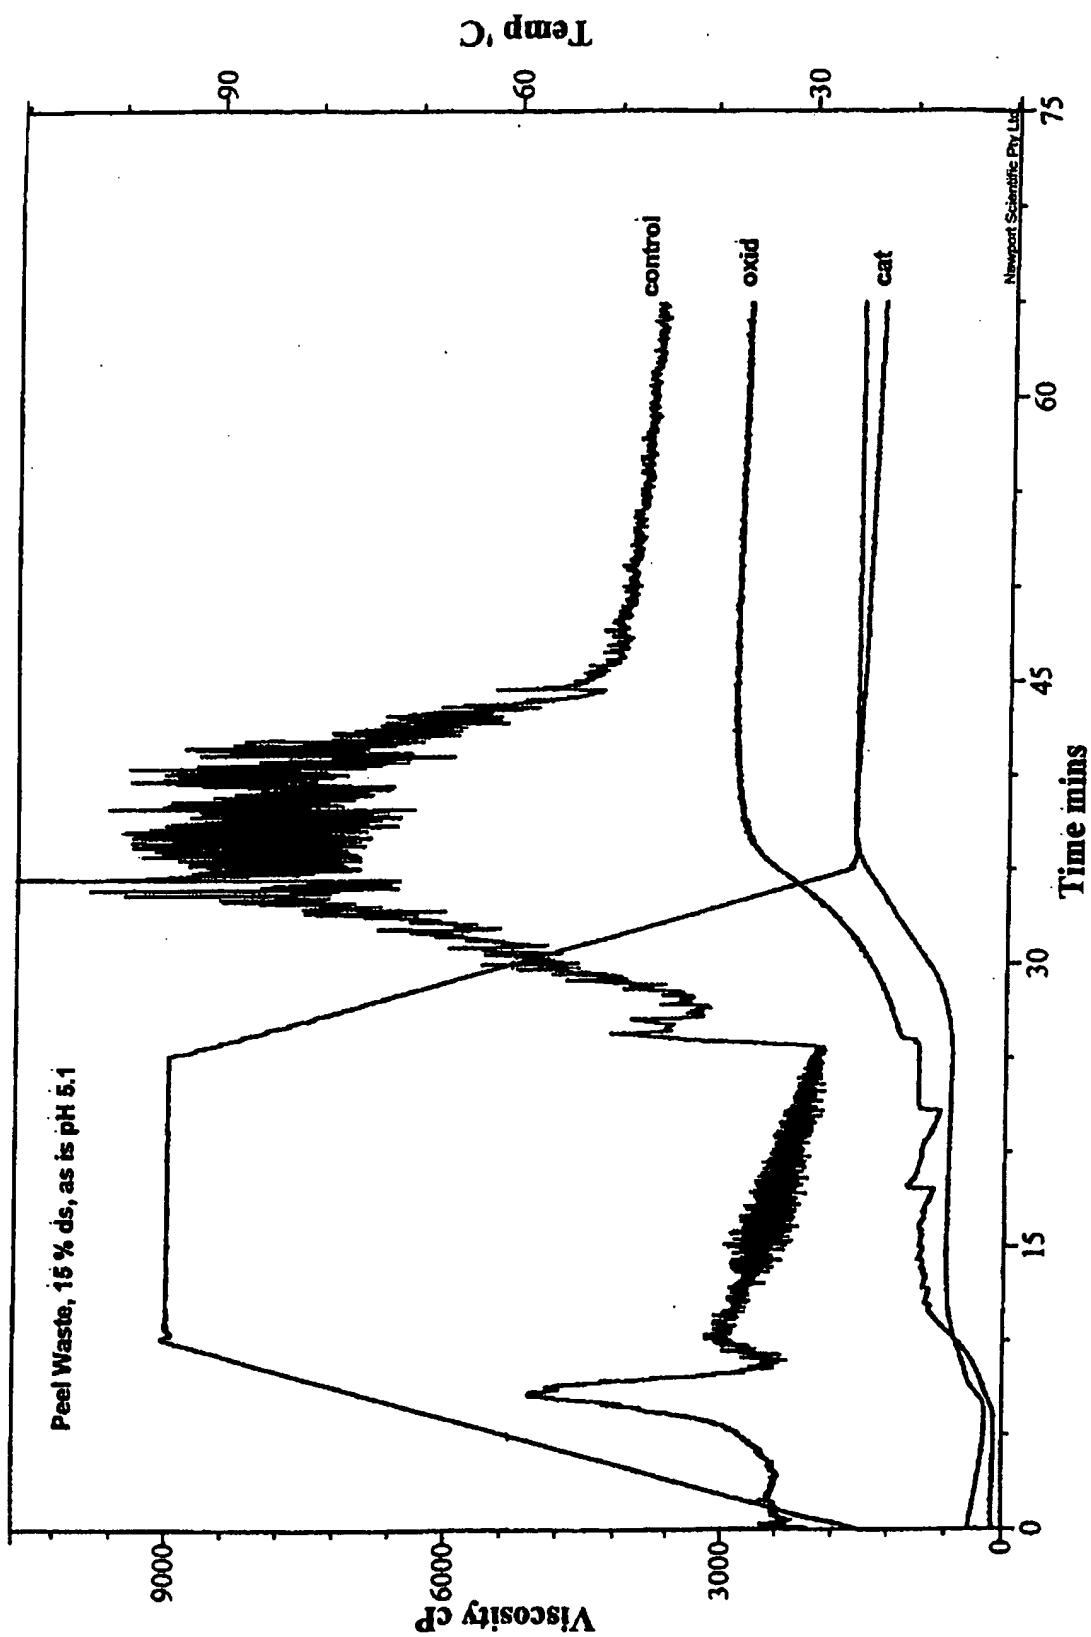

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/08143

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : Please See Extra Sheet.

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 428/323, 330, 341, 355CP, 532, 533, 534, 535; 427/372.2; 106/162.1, 162.51, 163.01; 156/328, 336

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST 2.0 AND EAST 1.1

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,587,332 A (LANE ET AL.) 6 MAY 1986, col. 1, lines 18-31 and col. 7, lines 17-25.	1-28
A	US 4,359,341 A (ALLEN) 16 NOVEMBER, 1982, col. 2, lines 41-54.	1-28
A	US 4,357,194 A (STOFKO) 2 NOVEMBER 1982, col. 1, lines 63-67.	1-28
A	US 4,627,951 A (SHEN) 9 DECEMBER 1986, col. 1, lines 13-21.	1-28
A	US 4,992,519 A (MUKHERJEE) 12 FEBRUARY 1991, col. 1, lines 7-13.	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 JUNE 2000

Date of mailing of the international search report

12 JUL 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

SHEEBA AHMED

Telephone No. (703) 308-0000

DEBORAH THOMAS
PARALEGAL SPECIALIST

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/08143

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (7):

B32B 5/16, 9/04, 15/04, 29/00, 23/04, 21/06; C09J 105/00, 4/00, 101/00; B05D 3/02; C08L 97/02, 1/00

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

428/323, 330, 341, 355CP, 532, 533, 534, 535; 427/372.2; 106/162.1, 162.51, 163.01; 156/328, 336